




PRODUCT FEATURES

Integrated design, easily installed, Internal components replacement easy and convenient, reduce the cost.



Intelligent controller can fit PIR sensor or Microwave sensor, ensure the effective lighting

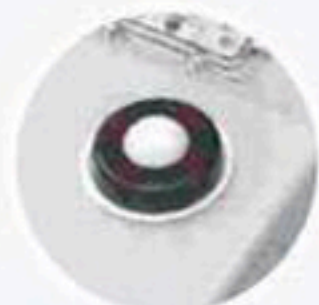

PIR sensor




Microwave sensor




Protection grade reaches IP66



Anti-Level-17 hurricane

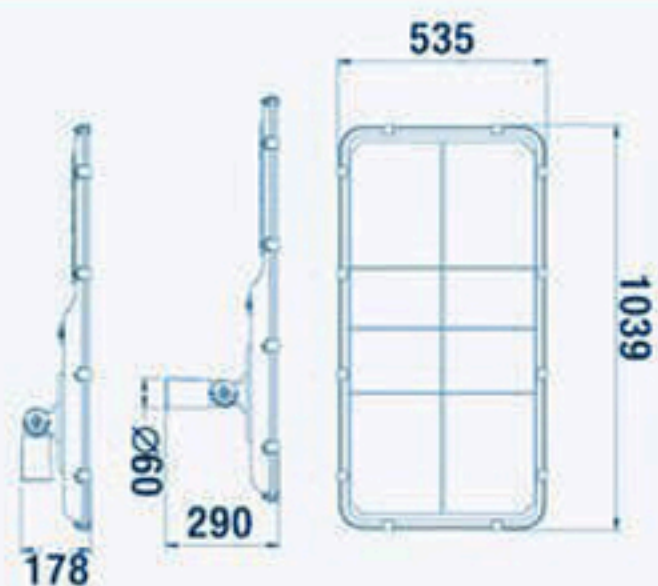

Light Distribution Curve

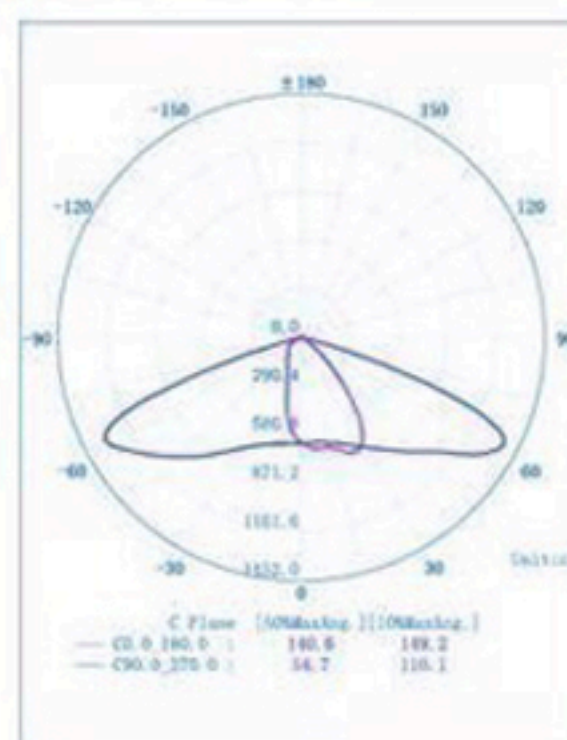

SPECIFICATION

Solar Panel	Monocrystalline
Light time	Full Power 12 Hrs
Charging	8 Hrs.
Material	Aluminum
LED type	SMD 3030 126pcs
Ambient Temp.(°C)	-10°C ~ 60°C
IP Rating	IP 66
CCT (K)	3000K - 6500K
Battery type	IFR Lithium iron
Operating time	> 4 days
Net Weight (Kg.)	17.8 kg
CRI	WW>70 CW>75
Work Life	30,000-50,000 hrs
Warranty	3 year

Product Model	Lamp Power (W)	Battery	Solar Cell	Lumen (lm)	Dimension (Lamp)			Install Height (m.)
					W	L	H	
20200710-JDZM	60	51AH	75W	>5,600lm	535	1039	178	5 - 7m.